


FEATURES

- High contact rating(40A)
- High temperature design
- 1 Form A and 1 Form C arrangements
- Ideal for use in control-car starter and light
- Quick connect or P.C. board terminals
- Dust cover or sealed type

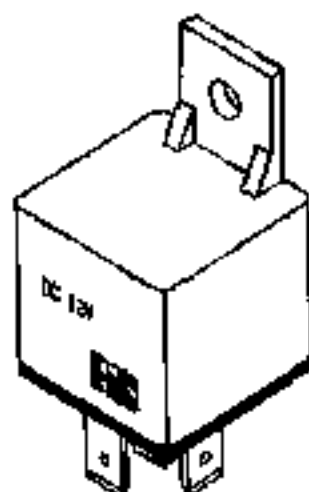

SPECIFICATIONS

COIL RATING


RATED VOLTAGE (V DC)	COIL RESISTANCE Ω +/- 10%	RATED CURRENT (mA)	MUST OPERATE VOLTAGE	MUST DROPOUT VOLTAGE	MAXIMUM VOLTAGE	POWER CONSUMPTION (W)
			% OF RATED VOLTAGE (At +20 °C)			
6	22.5	267	65 Max.	10 Min.	130 Max.	1.6
12	90	133				
24	360	67				

CHARACTERISTICS

Contact Arrangement	SPST (1 Form A) SPDT (1 Form C)
Contact Material	Silver Alloy
Contact Resistance	50m Ω Max
Contact Rating (Resistive Load)	N.O. : 40A 14VDC N.C. : 30A 14VDC
Switching Voltage	DC 75V
Operate Time	7ms Max.
Release Time	5ms Max.
Insulation Resistance	100M Ω Min. (500V DC)
Dielectric Strength	500Vrms between coil and contact
Shock Resistance	20g Approx.
Vibration Resistance	10-40Hz, Double amplitude 1.5mm
Ambient Temperature	-40°C to +85°C
Humidity	20 - 85% RH
Operation Life	Mechanical : 10 ⁷ Electrical : 10 ⁵
Weight	30g Approx.


[Specifications are subject to change without notices.]

ORDERING INFORMATION

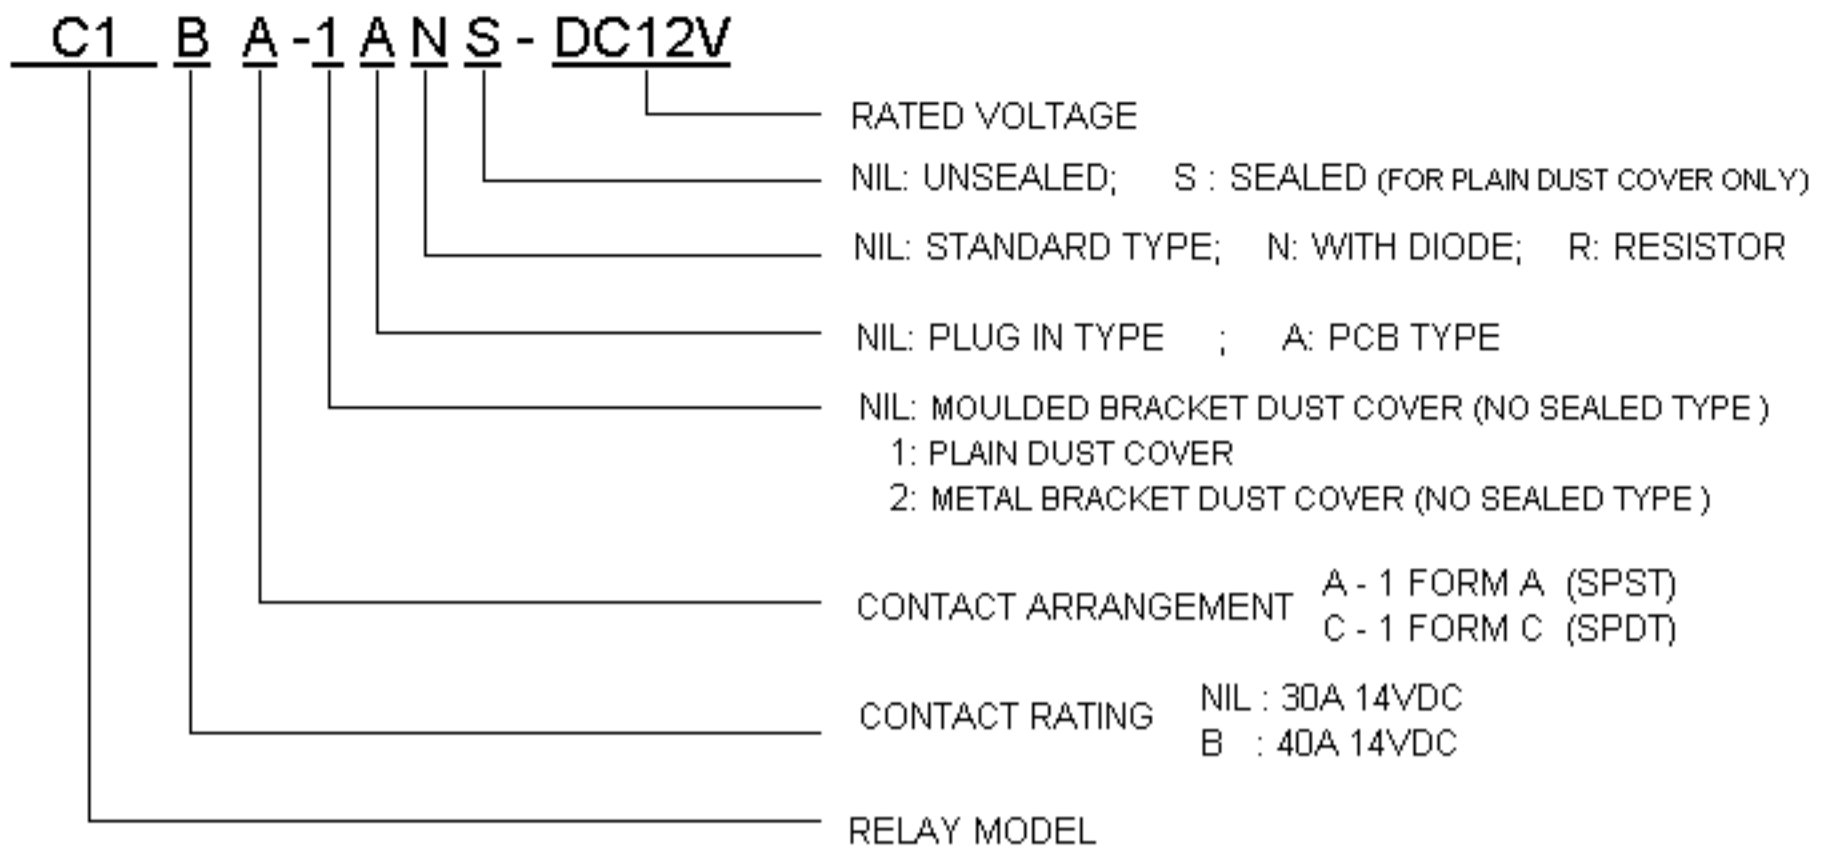


DIMENSIONS (UNIT:mm)


PLAIN DUST COVER
(PLUG IN TYPE TERMINAL)

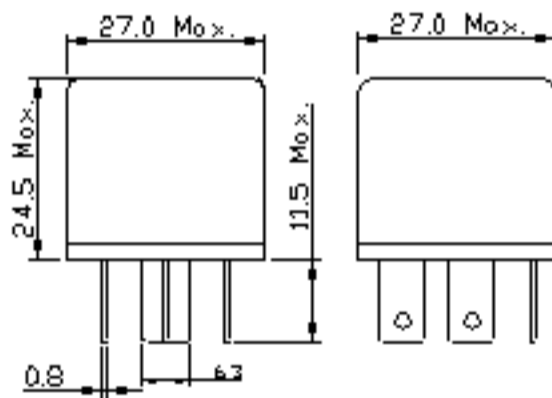


MOULDED BRACKET DUST COVER

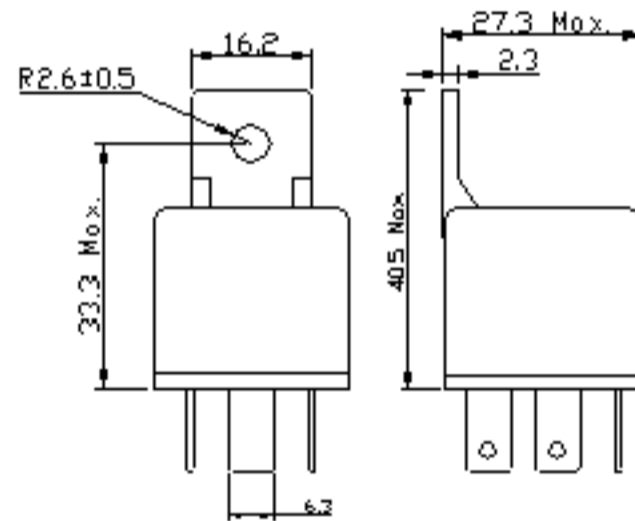

PCB TYPE TERMINAL

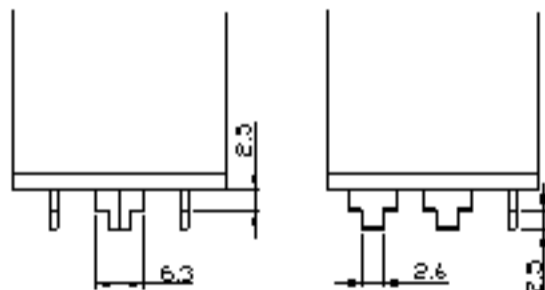

METAL BRACKET DUST COVER

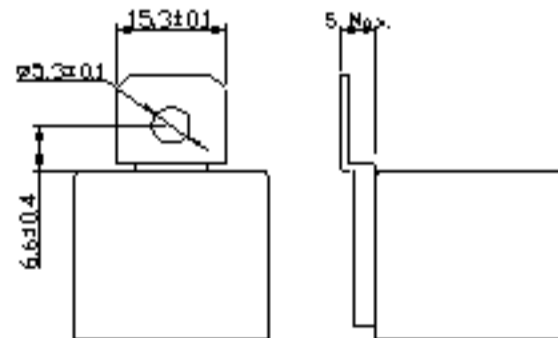

TERMINAL ARRANGEMENT (BOTTOM VIEW)

