

# T5


# PIC RELAY

## Compact Size Telecom Latching Relay

### FEATURES

Compact Size & Low Profile : 14(L) X 9(W) X 5(H) mm (STANDARD TYPE)  
 : 14.2 (L) X 9.3(W) X 5.3(H) mm (SMD TYPE)

Conforms to FCC Part 68 1500V Surge Dielectric  
 DIL Pitch Terminals  
 Surface Mount Type with "L" Shaped Terminals  
 Fully Sealed (Immersion Cleanable)  
 Single or Double Coil Latching Type is available.  
 High Sensitivity 140mm Nominal Power

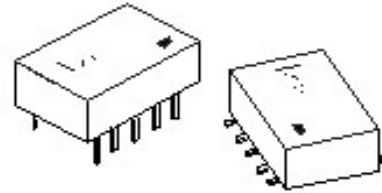

### Typical Applications :

Telecommunication Equipment	Office Equipment
Security Alarm Systems	Measuring Instruments
Medical Monitoring Equipment	Audio Visual Equipment
Flight Simulator	Sensor Control

## SPECIFICATIONS

### COIL RATING

#### SINGLE SIDE STABLE - T5 /T5S

RATED VOLTAGE (V DC)	COIL RESISTANCE ( $\Omega$ +/-10 %)	RATED CURRENT (mA)	MUST OPERATE VOLTAGE (V DC) MAX.	MUST RELEASE VOLTAGE (V DC) MIN.	MAXIMUM VOLTAGE (V DC) MAX.	POWER CONSUMPTION (W)
3	64.3	47	2.25	0.3	7.5	0.14 (APPROX.)
5	178	28	3.75	0.5	12.5	
6	257	23.5	4.5	0.6	15.0	
9	579	15.5	6.75	0.9	22.5	
12	1028	11.7	9.0	1.2	30.0	
24	2880	8.3	18.0	2.4	48.0	0.2 (APPROX.)

#### 1-COIL LATCHING - T5-L1

RATED VOLTAGE (V DC)	COIL RESISTANCE ( $\Omega$ +/-10 %)	SET VOLTAGE (V DC) MAX.	RESET VOLTAGE (V DC) MAX.	MAXIMUM VOLTAGE (V DC) MAX.	POWER CONSUMPTION (W)
3	90	2.25	2.25	8.7	0.10 (APPROX.)
5	250	3.75	3.75	14.5	
6	360	4.5	4.5	17.4	
9	810	6.75	6.75	26.1	
12	1440	9.0	9.0	34.8	
24	3840	18.0	18.0	57.6	0.15 (APPROX.)

## 2-COIL LATCHING - T5-L2 /T5S-L2

RATED VOLTAGE (V DC)	COIL RESISTANCE ( $\Omega$ +/-10 %)		SET VOLTAGE (V DC) MAX.	RESET VOLTAGE (V DC) MAX.	MAXIMUM VOLTAGE (V DC) MAX.	POWER CONSUMPTION (W DC)	
	SET COIL	RESET COIL				SET COIL	RESET COIL
3	45	45	2.25	2.25	6.0	0.2	0.2
5	125	125	3.75	3.75	10.0	0.2	0.2
6	180	180	4.5	4.5	12.0	0.2	0.2
9	405	405	6.75	6.75	18.0	0.2	0.2
12	720	720	9.0	9.0	24.0	0.2	0.2
24	1920	1920	18.0	18.0	40.8	0.3	0.3

## CHARACTERISTICS

Contact Arrangement	2 FORM C
Contact Material	Movable Contact : Silver Alloy Stationary Contact : Gold Clad Silver Alloy
Contact Resistance(Initial)	50m $\Omega$ Max. (Measured at 1A 6V DC)
Contact Rating (Resistive Load)	1A 30VDC / 0.5A 125VAC
Switching Voltage	DC 220V Max. AC 250V Max.
Switching Current	1A Max.
Switching Power	30W DC / 62.5VA AC
Switching Load (Min.)	0.01mA 10m VDC (Reference Value)
Electrostatic Capacitance	0.4pF Approx. (Between open contact) 0.9pF Approx. (Between coil and contact) 0.2pF Approx. (Between contact poles)
Operate Time (At Nominal Voltage)	2ms Approx.
Release Time (At Nominal Voltage)	1ms Approx.
Set Time (Latching at Nominal Voltage)	2ms Approx.
Reset Time (Latching)	2ms Approx.
Insulation Resistance	1000M $\Omega$ Min. at 500V DC
Dielectric Strength	1000Vrms/1 minute between open contact 1000Vrms/1 minute between coil and contact 1000Vrms/1 minute between contact sets
Surge Voltage (FCC)	1500V Between open contact 1500V Between coil and contact 2500V Between contact sets
Shock Resistance	Functional : 50G (11ms) Destructive : 100G (6ms)
Vibration Resistance	Functional : 3mm D.A. 10-55Hz Destructive : 5mm D.A. 10-55Hz
Temperature Range	T5 : -40°C to +70°C T5S : -40°C to +85°C
Operation Life (Assistive Load)	Mechanical : 10 <sup>8</sup> Electrical : 2 x 10 <sup>5</sup> at 1A 30VDC; 1 x 10 <sup>5</sup> at 0.5A 125VAC
Weight	1.5g Approx.


[Specifications are subject to change without notices]

# T5

# PIC RELAY


## ORDERING INFORMATION

### T5S - L1 DC 12V

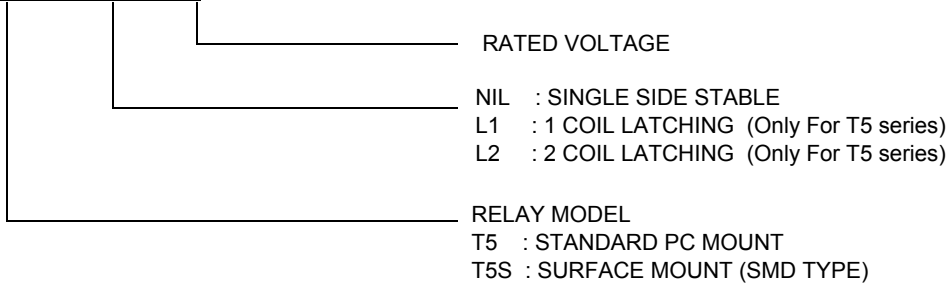

## DIMENSIONS (UNIT:mm)

### T5

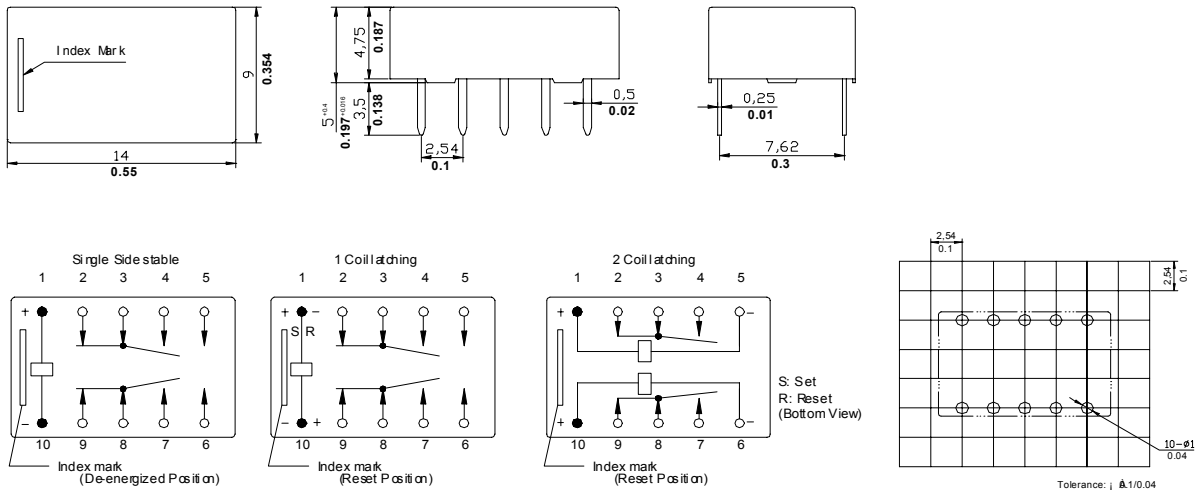

### T5S

